


CircLED SHROUD

The CircLED™ Shroud is a thermally conductive molded polymer Low Bay with a Shroud, NSF rated for Food processing. A lighter weight alternative to die cast fixtures with excellent water shedability.

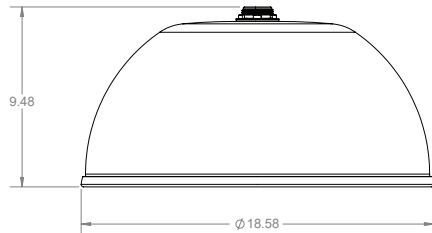

Optional Mounting

APPLICATIONS:

- Low Bay applications
- Food Processing
- Warehouses
- Commercial Malls
- Warehouse Clubs
- Supermarkets

FEATURES & BENEFITS:


- Designed for LEDs
- Powder Coated Aluminum Shroud
- Paint finish meets ASTM-B-117 Specifications
- Lightweight Design, 20lbs
- Easy Installation is contractor friendly
- Stainless Steel Shroud Rod supports: SLP Stainless Steel Hook, Pendant, Loop or Rigid Conduit Mounting
- Nominal 18.5" Diameter
- Frosted acrylic lens provides uniform glare-free lighting from the metal core LED array module

CERTIFICATIONS

- UL Wet Location
- IP65
- IP66
- IP69
- ROHS
- NSF
- Enclosed by Shroud Ring with Poured-in-place gasket, Shroud Rod and Gasketed Shroud Hub create a tight seal for IP66 Rating
- Optional White Wall Reflector pops in quickly to increase the light spread
- For use with Round LED Module
- Accommodates Occupancy Sensor
- U.S. manufactured CircLED™

Product offering and specifications subject to change without notice.

CircLED™ Shroud:

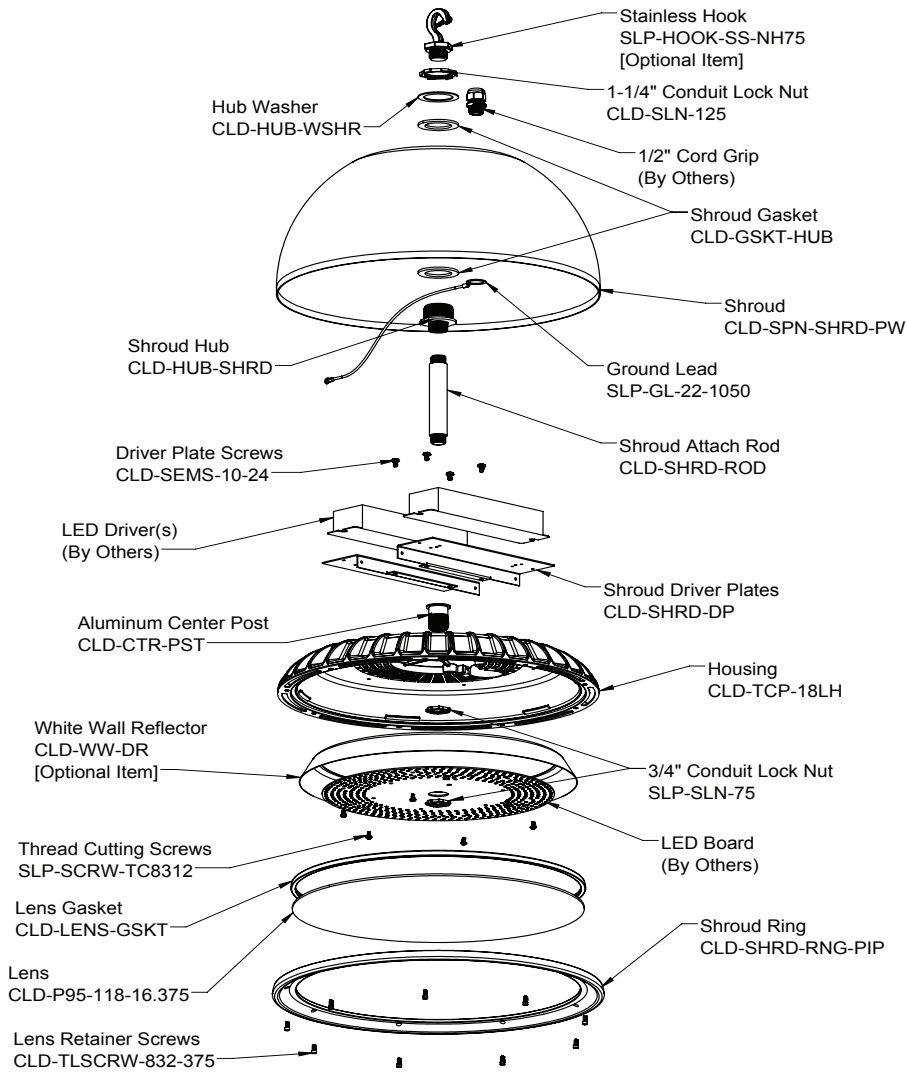

COMPONENT	STANDARD MATERIAL	PIECES REQUIRED PER ASSEMBLY	AVAILABLE OPTIONS
HOUSING	THERMALLY CONDUCTIVE PLASTIC	1	
THREADED CENTER POST	ALUMINUM	1	
DRIVER PLATES	ALUMINUM	2	
DRIVER BRACKET SCREWS	ZINC PLATED STEEL	4	
1-1/4" CONDUIT LOCKNUT	ZINC PLATED STEEL	1	
3/4" CONDUIT LOCKNUTS	ZINC PLATED STEEL	2	
THREAD CUTTING SCREWS	ZINC PLATED STEEL	6	
LENS GASKET	SANTOPRENE	1	
FLAT ACRYLIC LENS	ACRYLIC FROSTED LENS	1	
SHROUD RING	NORYL	1	
LENS RETAINER SCREWS	STAINLESS STEEL	9	
SHROUD SPINNING	ALUMINUM	1	
SHROUD HUB	ALUMINUM	1	
SHROUD GASKETS	NEOPRENE	2	
HUB WASHER	ALUMINUM	1	
SHROUD ROD	ALUMINUM	1	
GROUND LEAD		1	

Product offering and specifications subject to change without notice.

CircLED™ COMPONENTS:

CircLED™ HOUSING & SHROUD					
DIAMETER	DESCRIPTION	PART #	PCS/CTN	WT/CTN	FULL SKID QTY.
18"	THERMAL CONDUCTIVE PLASTIC HOUSING	CLD-TCP-18LH	10		
	SHROUD FOR FOOD PROCESSING-PAINTED WHITE	CLD-SPN-SHRD-PW		12	
	SHROUD RING WITH GASKET	CLD-SHRD-RNG-PIP			
CircLED™ LENS & ACCESSORIES					
DESCRIPTION	PART #	PCS/CTN	WT/CTN	FULL SKID QTY.	
FROSTED ACRYLIC LENS .118" THICK	CLD-P95-118-16.375				
LENS GASKET	CLD-LENS-GSKT				
WHITE WALL DIFFUSE REFLECTOR	CLD-WW-DR	100	20LBS/9.07KG		
CircLED™ DRIVER MOUNTING					
MATERIAL	PART #	PCS/BAG	PCS/CTN	WT/CTN	
ALUMINUM	CLD-SHRD-DP				
ZINC PLATED STEEL	CLD-SEMS-10-24				
CircLED™ HARDWARE					
MATERIAL	PART #	PCS/BAG	PCS/CTN	WT/CTN	
STAINLESS STEEL	CLD-SHRD-ROD	1	200	45LBS/ 20.41KG	
ALUMINUM	CLD-HUB-SHRD		12		
ALUMINUM	CLD-HUB-WSHR		250		
NEOPRENE	CLD-GSKT-HUB		200		
ZINC PLATED STEEL	CLD-SLN-125				
ALUMINUM	CLD-CTR-PST				
ZINC PLATED STEEL	SLP-SCRW-TC8312				
ZINC PLATED STEEL	SLP-SLN75	100	1000		
STAINLESS STEEL	CLD-TLSCRW-832-375		1000		
	SLP-GL-22-1050				
CircLED™ MOUNTING & ACCESSORIES					
PART #	PCS/BAG	PCS/CTN	WT/CTN		
SLP-HOOK-SS-NH75		48	20LBS/9.07KG		
CT-DCB-75	100		20LBS/9.07KG		

Product offering and specifications subject to change without notice.