


CircLED™ RB

- UL1598 Listed
- IP65 & IP66 Rated
- Lightweight Rugged Design: 20lbs
- Low or High Bay



Driver Mounting

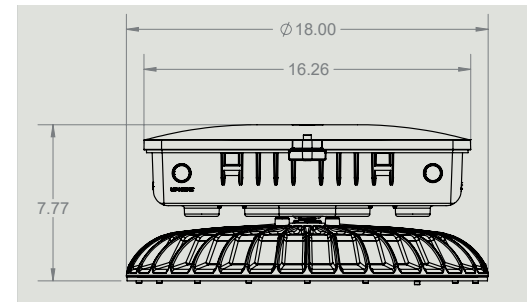

- SLP 5VA Remote Box Enclosure separates drivers from the board to reduce heat
- NEMA 4X Listed
- NEMA 13 Listed
- NSF Rated


Housing

- Thermally Conductive Molded Polymer
- 18" Diameter
- Center Threaded Post Holds LED Array to Housing and is Enclosed with Liquid Tight Plug
- Cord Grip Boss: 3/4" NPT/M20 Fittings



Lenses

- FR50 Acrylic or PC Flat Lens to control glare
- FR50 Acrylic or PC Drop Lens to control glare
- Clear Acrylic or PC Lens options available
- Lens Gasket and Retainer Ring create a tight seal for IP66 Rating
- Optional white wall reflector to boost lumen output
- Flat Lens Accommodates Occupancy Sensor

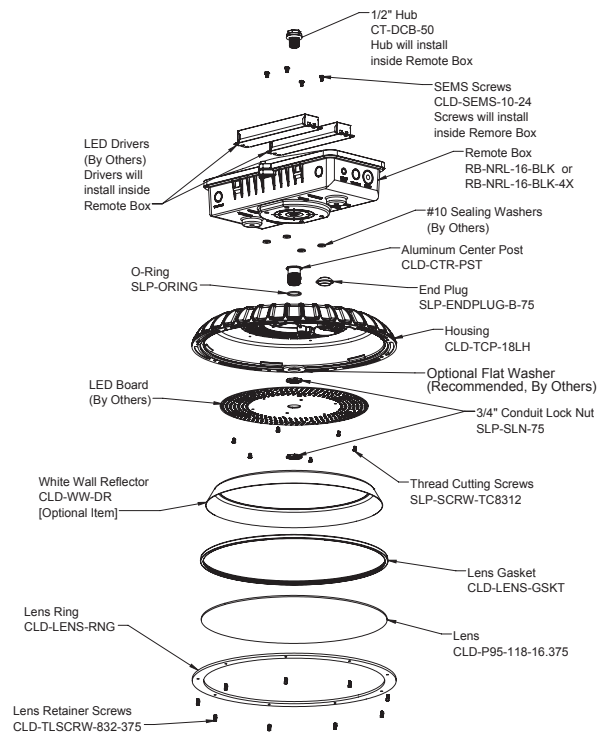

Mounting Options

- Remote Box Mounting Straps
- SLP Stainless Steel Hook
- Pendant Mount
- Direct to J-Box
- Rigid Conduit



Made in the USA